



Preliminary Fever Detection Solution

E-Guardian S408





Features

- Quick preliminary fever screening without contact
- HMI & thermal camera integrated all-in-one solution
- Intuitive user interface with touchscreen and physical buttons
- AI human recognition for accurate temperature measurements
- On-screen & audio alerting system
- Blackbody & offset adjustment to enhance accuracy
- Slim design, easy deployment

System		Calibration	Blackbody, $\pm 0.3^{\circ}\text{C}$
Measuring Distance	0.5M ~1M	Blackbody Power	Power Input: DC5V/2.5A Power adapter: 5V/2.5A, 3M
Accuracy	$\pm 0.5^{\circ}\text{C}$ (@25 $^{\circ}\text{C}$)(after calibration to environment)	Communication	
Offset Adjustment	On-screen adjustment, $\pm 5^{\circ}\text{C}$	Wi-Fi	802.11 a/n/g/n
System Power	5V/2A	WiFi Antenna	Built-in dual band (2.4G/5G) chip antenna
HMI		Certifications	
HMI Display	8" Capacitive touch screen	Compliance	CE, FCC, NCC
CPU	Quad-Core ARM Cortex-A53 1.0Ghz	Mechanical	
OS	Android 7.0	Dimensions	S408: 226.7 x 252.1 x 81.1 mm (W x H x D) Blackbody: 90 x 130 x 33 mm (W x H x D)
Memory	3GB LPDDR2	Net Weight	S408 w/o magnetic holders: 1.40 kg S408 w/ magnetic holders: 1.59 kg Blackbody: 0.81 kg
Storage	16GB eMMC	Working Temp.	15~30 $^{\circ}\text{C}$
Brightness	400 nits	Storage Temp.	-10~50 $^{\circ}\text{C}$
Control	Reset button, Volume control	Package	
I/O	Micro USB (power connection) microSD card slot (max 64G) (for App upgrade)	Contents	<ul style="list-style-type: none"> • S408 (including Infrared camera, HMI, mounting plate, Y-power cable and 2 x magnetic holders, all preassembled) • S408 Universal Power Adapter • Blackbody Calibrator, w/ power adapter
LED	Power status LED	Package Dimension	500 x 310 x 125 mm (L x W x H)
Thermal System		Weight	3.5 kg
Thermal Imaging	Lepton 2.5, on board	Optional Accessories	Tripod for S408 (2.8M, standard 1/4" thread) Tripod for the blackbody calibrator (1.5M, standard 1/4" thread, HS368)
Spectral Range	Longwave infrared, 8 μm to 14 μm		
Array Format	80 x 60		
Field of View	51 $^{\circ}$ x 63.5 $^{\circ}$ (H x D)		
Power Jack	1 x 3-pin M8 power jack (IP67)		
Button	Power button		
LED	3-color LED; Pair, Link, Activity		

All specifications are subject to change without notice. Last update: 27/04/2020

Dimensions

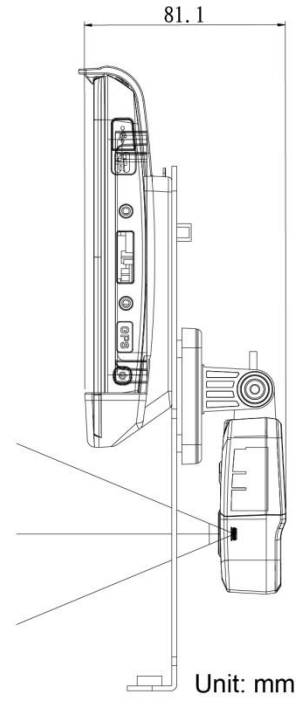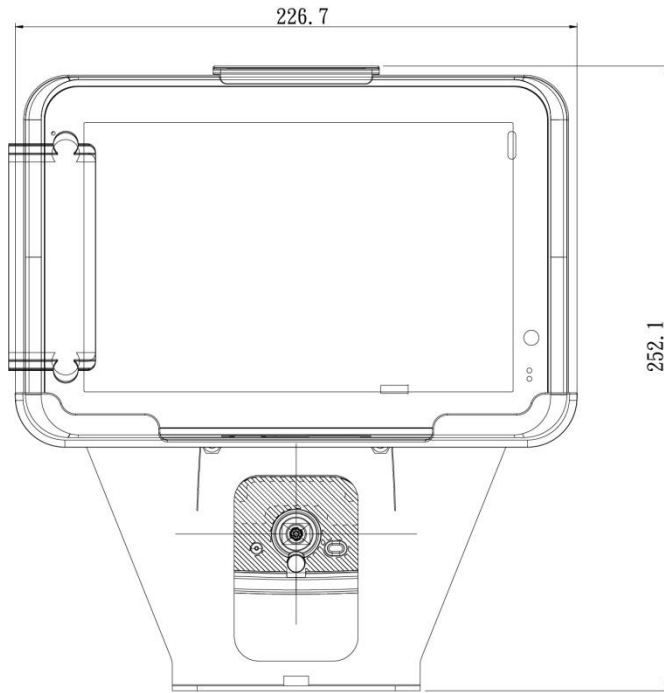

ARBOR

ARBOR Technology U.K.

Unit 32, Walker Avenue, Wolverton Mill, Milton Keynes, MK12 5TW, United Kingdom

01908 310100

sales@arbor-uk.com



Preliminary Fever Detection

E-Guardian S408

Fast and Advanced Thermal Imaging for Epidemic Prevention




- High accuracy, error margin of $\pm 0.5^{\circ}\text{C}$
- Real-time thermal image
- 8"inch tablet as HMI, easily viewable result
- Warning graphic and sounds



Easy Installation, Setup and Optimization

- One stop fever detection total solution
- Combine thermal imager with HMI
- Adjustable angle for maximum flexibility
- High accuracy detection with blackbody

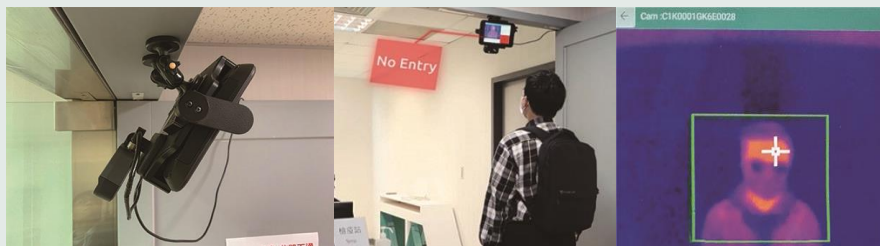

Reduce Physical Contact, Keep Safe Social Distance

- Thermal imager can help reduce physical contacts on screening
- Easy installation and calibration process for different applications
- Advanced fever detection Software is included
- Intuitive user interface, touch screen and physical buttons

